



Resicore Rubber GY






Resicore Rubber GY is an ultra-durable, non-porous rubberized sports surface that is available in a realistic smooth or textured wood looking pattern. The product's excellent shock absorption and coefficients of friction levels provide athletes with ideal playing performance benefits. Manufactured in rolls for easy installation, Resicore Rubber GY requires no finishing or recoating and contains an anti-microbial that helps to resist the buildup of bacteria.

Available in: 5, 6, 8, 10, 12, 13, & 14mm thicknesses

- A. Rubberized smooth or textured top layer has been engineered for multi-purpose activity.
- B. The energy efficient core of the system absorbs impact and allows for safe, high performance playability.
- C. Base layer assists in the stabilization of the system and provides shock reduction benefits.

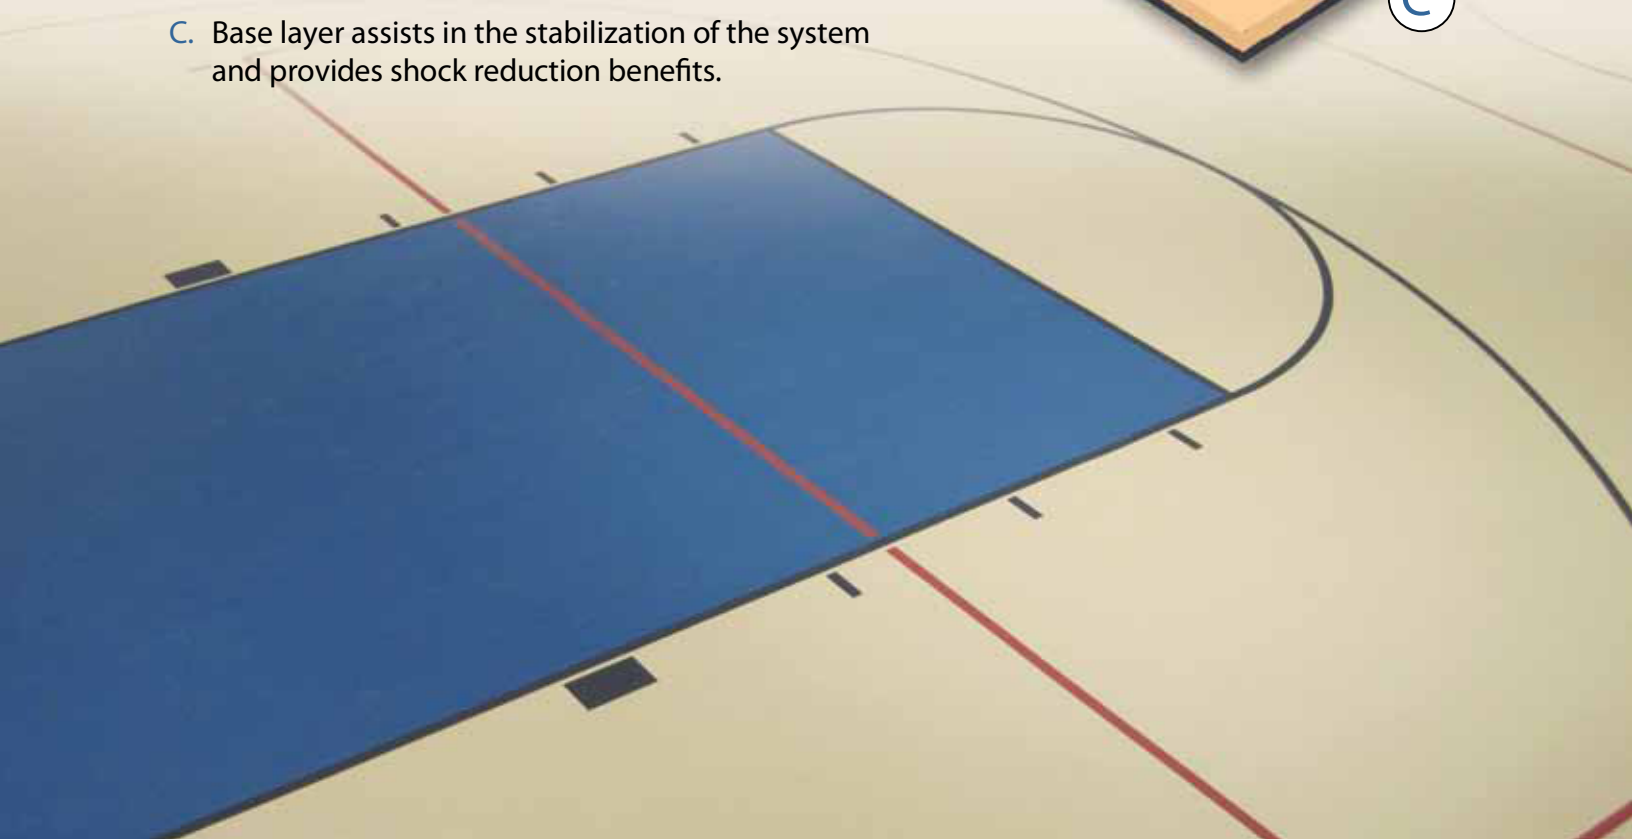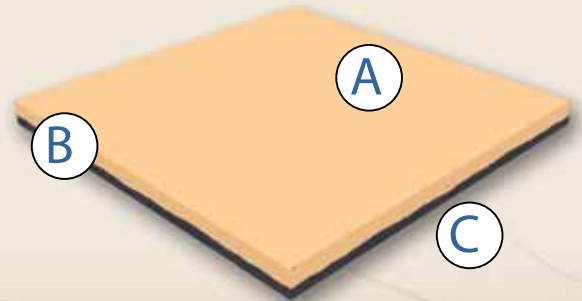

Resicore Rubber GY is available in the following designer colors:

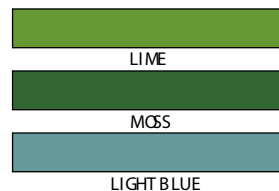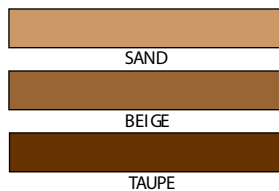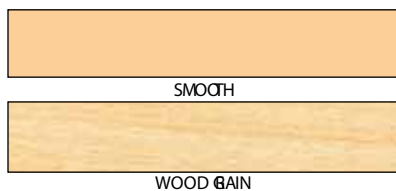

All colors are available in smooth or wood grain textures.



Resicore Rubber GY

TECHNICAL CHARACTERISTICS

Characteristic	Resicore Rubber GY
Thickness	5,6,8,10,12,13,14mm
Roll Width	30-54" max
Roll Length	49.2 ft
Weight	1.12-3.14 lbs/sq.ft.
Surface Texture	Textured or Smooth
Wear Surface	2-5mm
Shock Absorption - ASTM F2772	Category 1 - 2
Ball Rebound - ASTM F2772	>90%
Vertical Deformation	0.6mm
Shore Hardness - ASTMD2240	63 (Top Layer)
V.QC. Compliance	Yes
Rolling Load	1000N pass
Flammability	Class 1
Recycled Content	30%
Warranty	3 years
Maintenance	See Guidelines

Information

(800) 724-2969
info@tarkettsports.com
www.tarkettsportsindoor.com